


RF POWER AMPLIFIERS



RXRF-PS



RXR

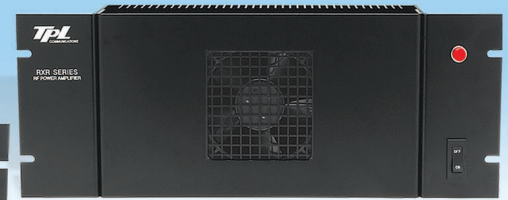

RXRF

MODEL	POWER IN	POWER OUT	CURRENT DRAIN
VHF Low Band 29.7-50 MHz			
PA1-1AC-RS	1-4W	10-40W	8 Amps
PA1-1AC3-RS	2-8W	10-40W	8 Amps
PA1-1AE-RXRF	2-4W	60-100W	16 Amps
PA1-1BE-RXRF	4-8W	60-100W	16 Amps
PA1-1CE-RXRF	8-16W	60-100W	16 Amps
PA1-1DE-RXRF	20-40W	60-100W	16 Amps
PA1-1FE-RXRF	40-60W	60-100W	16 Amps
VHF Mid Band 66-88 MHz (For export only - Not FCC Certified)			
PA2-1AD-RXRF	1-4W	60-100W	14 Amps
PA2-1CD-RXRF	5-25W	40-100W	14 Amps
VHF High Band 136-174 MHz			
PA3-1AC-RSF	1-5W	10-45W	8 Amps
PA3-1AC3-RSF	2-8W	10-45W	8 Amps
PA3-1DC-RSF	8-15W	30-45W	6 Amps
*PA3-1EE-RXRF	50-250mW	90-150W	24 Amps
PA3-1AE-RXRF	1-2.5W	80-150W	20 Amps
PA3-1AE3-RXRF	2.5-5W	80-150W	20 Amps
PA3-1DE-RXRF	8-15W	80-150W	16 Amps
PA3-1FE-RXRF	15-25W	80-150W	14 Amps
PA3-1FE3-RXRF	25-50W	80-150W	14 Amps
PA3-2FF-RXHF3 (28 VDC)	8-15W	200-250W	18 Amps
PA3-2GF-RXHF3 (28 VDC)	20-70W	140-250W	18 Amps
UHF LOW Band 216-222 MHz			
PA4-1AE-RXRF	1-4W	70-100W	18 Amps
PA4-1BE-RXRF	8-15W	70-100W	14 Amps
UHF Band 400-512 MHz			
PA6-1AC-RSF	1-4W	10-50W	8 Amps
PA6-1AC3-RSF	2-8W	10-50W	8 Amps
PA6-1BC-RSF	8-15W	25-50W	7 Amps
*PA6-1EE-RXRF	50-250mW	75-100W	24 Amps
PA6-1AE-RXRF	1-3W	75-100W	20 Amps
PA6-1AE3-RXRF	3-6W	75-100W	20 Amps
PA6-1BE-RXRF	8-15W	75-100W	16 Amps
PA6-1FE-RXRF	15-30W	75-100W	15 Amps
UHF High Band 700-960 MHz			
PA7-2BE-RXRF (28 VDC)	8-15	70-100W	8 Amps
*PA8-1EB-RS	50-250mW	20-35W	8 Amps
PA8-1AA-RS	1-3W	10-20W	5 Amps
PA8-1AB-RS	1-5W	10-35W	7 Amps
*PA8-1ED-RXRF	50-250mW	50-80W	20 Amps
PA8-1AC-RXRF	1-5W	40-80W	16 Amps
PA8-1DD-RXRF	4-8W	40-80W	16 Amps
PA8-1FD-RXRF	15-30W	40-80W	12 Amps

*Input range must be specified at time of order.